

**DEMOLITION FLOOR PLAN – MECHANICAL DUCTWORK**  
SCALE: 3/16" = 1'-0"

**DEMOLITION NOTES THIS SHEET**

- 1 REMOVE DUCTWORK, GRILLES AND DIFFUSERS, INSULATION, HANGERS AND SUPPORTS COMPLETE TO POINT INDICATED. PROVIDE TEMPORARY AIRTIGHT CAPS WHERE DUCT WILL BE RECONNECTED.
- 2 REMOVE HIGH-PRESSURE VARIABLE AIR VOLUME BOX AND ASSOCIATED PNEUMATIC THERMOSTAT AND TUBING. SEE NEW WORK ON DRAWING M1.3G. TEMPORARILY CAP CONTROL AIR SOURCE.
- 3 REMOVE CEILING MOUNTED UNIT HEATER, HANGERS AND SUPPORTS.
- 4 REMOVE DSS, EVAPORATOR AND CONDENSER LOCATED ON ROOF, REFRIGERANT AND DRAIN PIPING COMPLETE. TURN OVER ALL EQUIPMENT TO OWNER.
- 5 REMOVE DIFFUSERS AND GRILLES TO POINT OF DEMOLITION LIMIT. REFER TO NEW WORK DRAWING M1.3G FOR AIRFLOWS.


**ASBESTOS AND LEAD PAINT NOTE**

AN ASBESTOS INSPECTION WAS PERFORMED AND ASBESTOS CONTAINING MATERIALS WERE FOUND GENERALLY IN THE AREAS INDICATED IN THE ASBESTOS SURVEY/INSPECTION REPORT WHICH IS AVAILABLE TO THE CONTRACTOR(S) FOR HIS INFORMATION. ASBESTOS CONTAINING MATERIALS HAVE BEEN REMOVED UNDER A SEPARATE CONTRACT.

A LEAD-BASED PAINT INSPECTION WAS PERFORMED AND LEAD-BASED PAINT WAS FOUND IN THE AREAS INDICATED. THE CONTRACTOR SHALL BE RESPONSIBLE WITH ALL REQUIREMENTS OF THE VIRGINIA OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION REGULATIONS LEAD-BASED PAINT PROTECTION OF WORKERS.


**REFRIGERANT RECOVERY NOTE**

REFRIGERANT FROM EXISTING MECHANICAL SYSTEMS SHALL BE RECOVERED AND RECYCLED FOR RECLAIM. EQUIPMENT CAPABLE OF PULLING A VACUUM OF LESS THAN 1000 MICRONS OF MERCURY SHALL BE USED TO RECOVER REFRIGERANT. MECHANICAL SYSTEMS SHALL NOT BE OPENED TO ATMOSPHERE UNTIL ALL REFRIGERANT IS FULLY RECOVERED. THE CONTRACTOR SHALL PROVIDE CONTAINERS FOR THE STORAGE OF THE REFRIGERANT. REFRIGERANT SHALL BECOME THE PROPERTY OF THE CONTRACTOR.

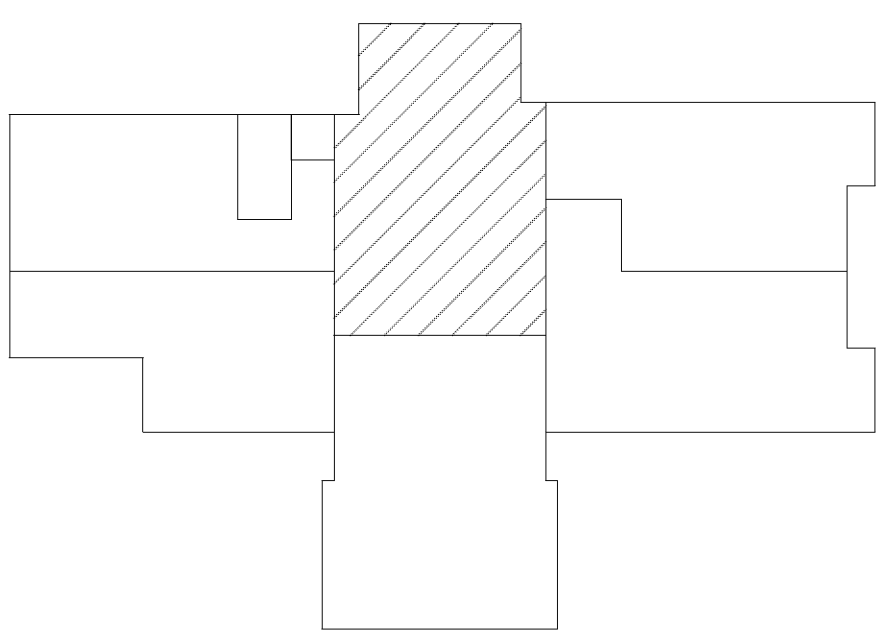


**KEYPLAN**  
NO SCALE

**GRAPHIC SCALES**




**nbij** ARCHITECTURE  
A Professional Limited Company  
GROVE PARK SQUARE  
11537-B NUCKOLS ROAD  
Richmond, Virginia 23069  
Tel: (804) 273-9811 Fax: (804) 273-9843

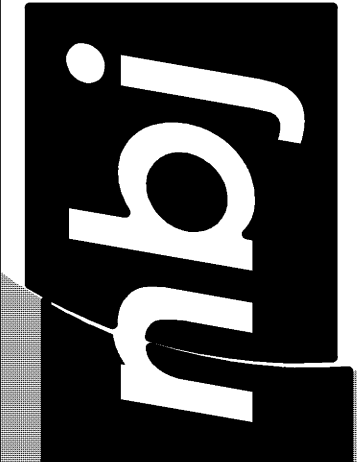

**RAPPAHANNOCK  
COMMUNITY COLLEGE**  
CAMPUS RENOVATIONS  
WARSAW + GLENN'S, VIRGINIA  
PC: 260-17712

**GLENN'S CAMPUS  
DEMOLITION FLOOR  
PLAN – MECHANICAL DUCTWORK**

Date:	JANUARY 13, 2010
REVISIONS	
NO.	DATE

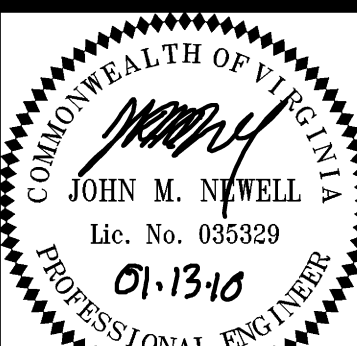

Sheet  
**MD1.3G**  
File Number  
XX